


Dozvoljena računska opterećenja Porotherm nadvoja


Porotherm nadvoj 12x6,5

Dužina (cm)	100	125	150	175	200	225	250	275	300
Raspon (cm)	75	100	125	150	175	200	225	250	275
$q_{s,d}$ (kN/m)	6,46	4,98	3,98	3,27	2,74	2,32	2,49	2,22	1,72

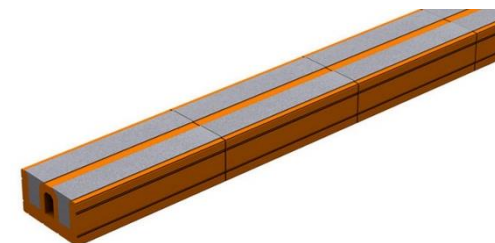

Porotherm nadvoj 10x8,5

Dužina (cm)	100	125	150	175	200	225	250	275	300	325
Raspon (cm)	75	100	125	150	175	200	225	250	275	300
$q_{s,d}$ (kN/m)	2,80	2,01	1,68	1,40	1,20	1,05	0,93	0,84	0,76	0,70

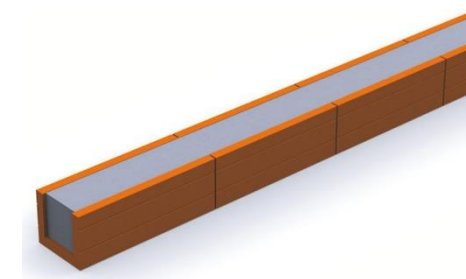

Porotherm nadvoj 6,5x23,8

Dužina (cm)	100	125	150	175	200	225	250	275	300
Raspon (cm)	75	100	125	150	175	200	225	250	275
q_{s,d} (kN/m)	8,50	8,50	9,50	9,50	11,00	8,50	8,50	7,00	7,00

